## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

#### (19) World Intellectual Property Organization International Bureau





(43) International Publication Date 22 July 2004 (22.07.2004)

**PCT** 

### (10) International Publication Number WO 2004/060134 A1

(51) International Patent Classification7:

A47L 25/00

(21) International Application Number:

PCT/JP2003/015432

(22) International Filing Date: 2 December 2003 (02.12.2003)

(25) Filing Language:

**English** 

(26) Publication Language:

English

(30) Priority Data:


2002-377610 26 December 2002 (26.12.2002)

(71) Applicant (for all designated States except US): KAO CORPORATION [JP/JP]; 14-10, Nihonbashi Kayaba-cho, 1-chome, Chuo-ku, Tokyo 103-8210 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WADA, Minoru [JP/JP]; c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, Tochigi 321-3497 Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, Tochigi 321-3497 (JP). SHIZUNO, Akihito [JP/JP]; c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, Tochigi 321-3497

- (74) Agents: HATORI, Osamu et al.; Akasaka HKN Bldg. 6F, 8-6, Akasaka 1-chome, Minato-ku, Tokyo 107-0052 (JP).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

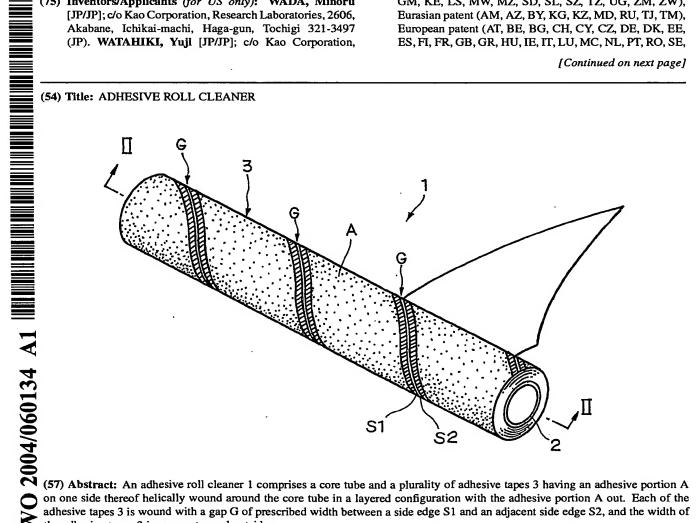

on one side thereof helically wound around the core tube in a layered configuration with the adhesive portion A out. Each of the adhesive tapes 3 is wound with a gap G of prescribed width between a side edge S1 and an adjacent side edge S2, and the width of the adhesive tapes 3 increases toward outside.

# WO 2004/060134 A1



SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.